

# REPLACEMENT PARTS GUIDE

## 648M Quik-Trak™ Mower with 48 inch Side Discharge Deck

### ENGINE



**OIL FILTER**  
[AM125424](#)

Change every 100 hours or Annually.



#### ENGINE OIL

[TY26669](#) (John Deere Plus-50™ 10W-30)  
(2.1 L (2.2 qt.))

Change every 100 hours or Annually.



#### AIR FILTER

[M131802](#) (PRIMARY AIR CLEANER)

Change every 300 hours.

[M131803](#) (SECONDARY AIR CLEANER)

Change every 500 hours.



**JOHN DEERE MULTI-PURPOSE HD LITHIUM COMPLEX GREASE**  
[TY24416](#)

#### GREASE GUN

[TY26183](#)  
Change As Required.



#### FUEL FILTER - IN - LINE

[UC21217](#)

Change every 300 hours.



#### SPARK PLUG

[M805853](#)

Change every 1000 hours.



### FUEL & AIR



#### FILLER CAP

[TCU34085](#) (S/N: -075001)

[AUC14828](#) (S/N: 075001-)



#### MUFFLER

[TCA24531](#)

### ELECTRICAL



#### ROTARY SWITCH

[TCA22740](#) (S/N: - 060000)

[AUC18708](#) (S/N: 060001-)



#### CONTROL LEVER THROTTLE CABLE

[AUC18415](#) (S/N: - 110000)

[AUC20360](#) (S/N: 110001- )



#### REVERSE IMPLEMENT PUSH SWITCH

[AUC11785](#)



#### IGNITION KEY

[AUC12681](#)



#### BATTERY

[TY25221B](#) (12 V) (FOR USA AND CANADA)

[MCYP340PF](#) (12 V) (NOT FOR USA AND CANADA)

### TRANSMISSION/ HYDRAULIC



#### HYDRAULIC OIL FILTER

[TCA23150](#)

Change every 100 hours or Annually.



#### TRACTION DRIVE BELT

[UC18232](#) (LGTH = 1301.5 mm,  
WIDTH = 12.45 mm and TK = 8 mm)

# REPLACEMENT PARTS GUIDE

## 648M Quik-Trak™ Mower with 48 inch Side Discharge Deck



### MOWER BLADE

[TCU37209](#) (CUT LENGTH = 165.1 mm)



### MULCH KIT


[UC10751](#) (MULCH BLADE)

[BUC10059](#) (KIT)



### MOWER DECK LEVELLING

[AM130907](#)

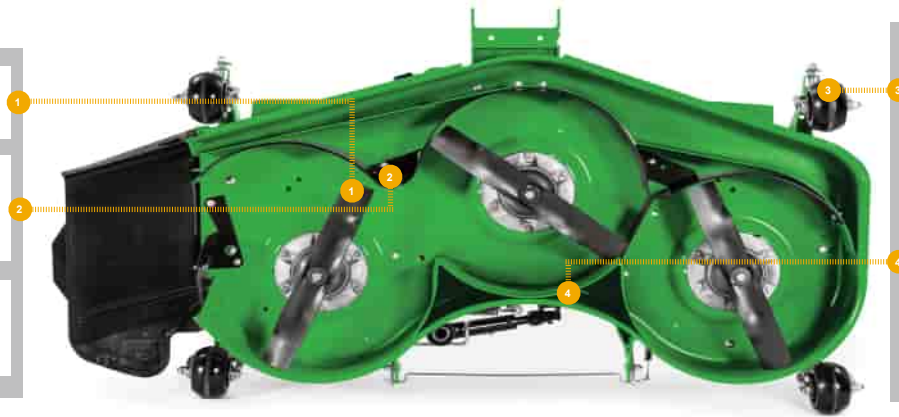

### GAUGE WHEELS

[UC28193](#)



### FLAT MOWER BELT

[TCU37206](#) (Primary) (S/N: - 045000)  
(LGTH = 1779.01 mm,  
WIDTH = 16.66 mm, TK = 10.31mm)

[UC11306](#) (Primary) (S/N: 045001-)  
(LGTH = 1770.8 mm, WIDTH = 16 mm)

[TCU34217](#) (Secondary) (LGTH = 1321.82 mm,  
WIDTH = 16.66 mm, TK = 10.31 mm)