# PowerTech ™ 6068HF250 Diesel Engine

**Industrial Engine Specifications** 






6068HF250 shown

# Certifications

CARB EPA Tier 1 EU Stage I

## **Engine dimensions**

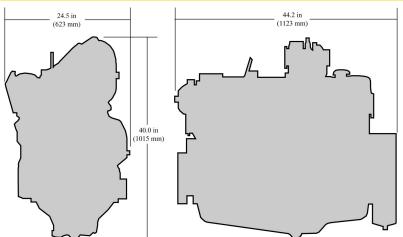

Dimensions may vary according to options selected. Call your distributor for more information.

### General data

Model 6068HF250		
Number of cylinders	6	
Displacement - L (cu in)	6.8 (415)	
Bore and Stroke mm (in)	106 x 127 (4.17 x 5.00)	
Compression Ratio	17.0:1	
Engine Type	In-line, 4-Cycle	
Aspiration	Turbocharged and air-to-air aftercooled	

Length - mm (in)	1123 (44.2)
Width - mm (in)	623 (24.5)
Height mm (in)	1015 (40.0)
Weight, dry kg (lb)	568 (1252)

### Performance data range

3	
Application ratings	Intermittent
Rated power/Rated speed	168 kW (225 hp) @2400rpm
Peak power	168 kW (225 hp) @2400rpm
Power bulge	NA @ NA rpm
Peak torque	839 N.m (619ft-lb) @1400rpm
Torque rise	NA

The Industrial Intermittent engine power rating is for applications that operate at varying loads and speeds, and do not fit the Industrial Heavy-Duty rating information.

Power output is within + or - 5% at standard SAE J 1995 and ISO 3046.

### Features and benefits

### Dynamically Balanced Crankshaft

- Crankshafts are machined from a heat-treated, high carbon steel forging

### Forged-Steel Connecting Rods

- Unique 45-degree design permits the use of larger crankshaft connectingrod bearings for increased durability

### Self-adjusting Poly-vee Fan Drive

- Se If-adjusting, eight-groove, poly-vee fan drive provides multiple fan drive ratios and fan heights that can be matched to specific application requirements
- Poly-vee design provides more than twice the drive capacity of comparable vee-belts

### Replaceable Wet-Type Cylinder Liners

- Provides excellent heat dissipation
- Precision machined for long life

### Either-Side Service

- Engine installation and maintenance simplified and convenient by providing dipstick and oil filter options on both sides of the engine

### Standard Gear Auxiliary Drive

- Standard gear auxiliary drive produces up to 50 hp (37 kW) for gear-driven accessories

### Mounting Points

- Standard front and side mounting points provide easy installation and application flexibility

John Deere Power Systems 3801 W. Ridgeway Ave. PO Box 5100 Waterloo, IA 50704-5100

Phone: 1-800-533-6446 Fax: 319.292.5075

John Deere Power Systems Usine de Saran

La Foulonnerie - B.P. 11.13 45401 Fleury les Aubrais Cedex France

Phone: 33.2.38.82.61.19 Fax: 33.2.38.82.60.00