


FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

9R Four Wheel Drive Final Tier 4 (FT4) Series Tractors - 9370R, 9420R, 9470R, 9520R, 9570R & 9620R



April 2019. Subject to change without notice.

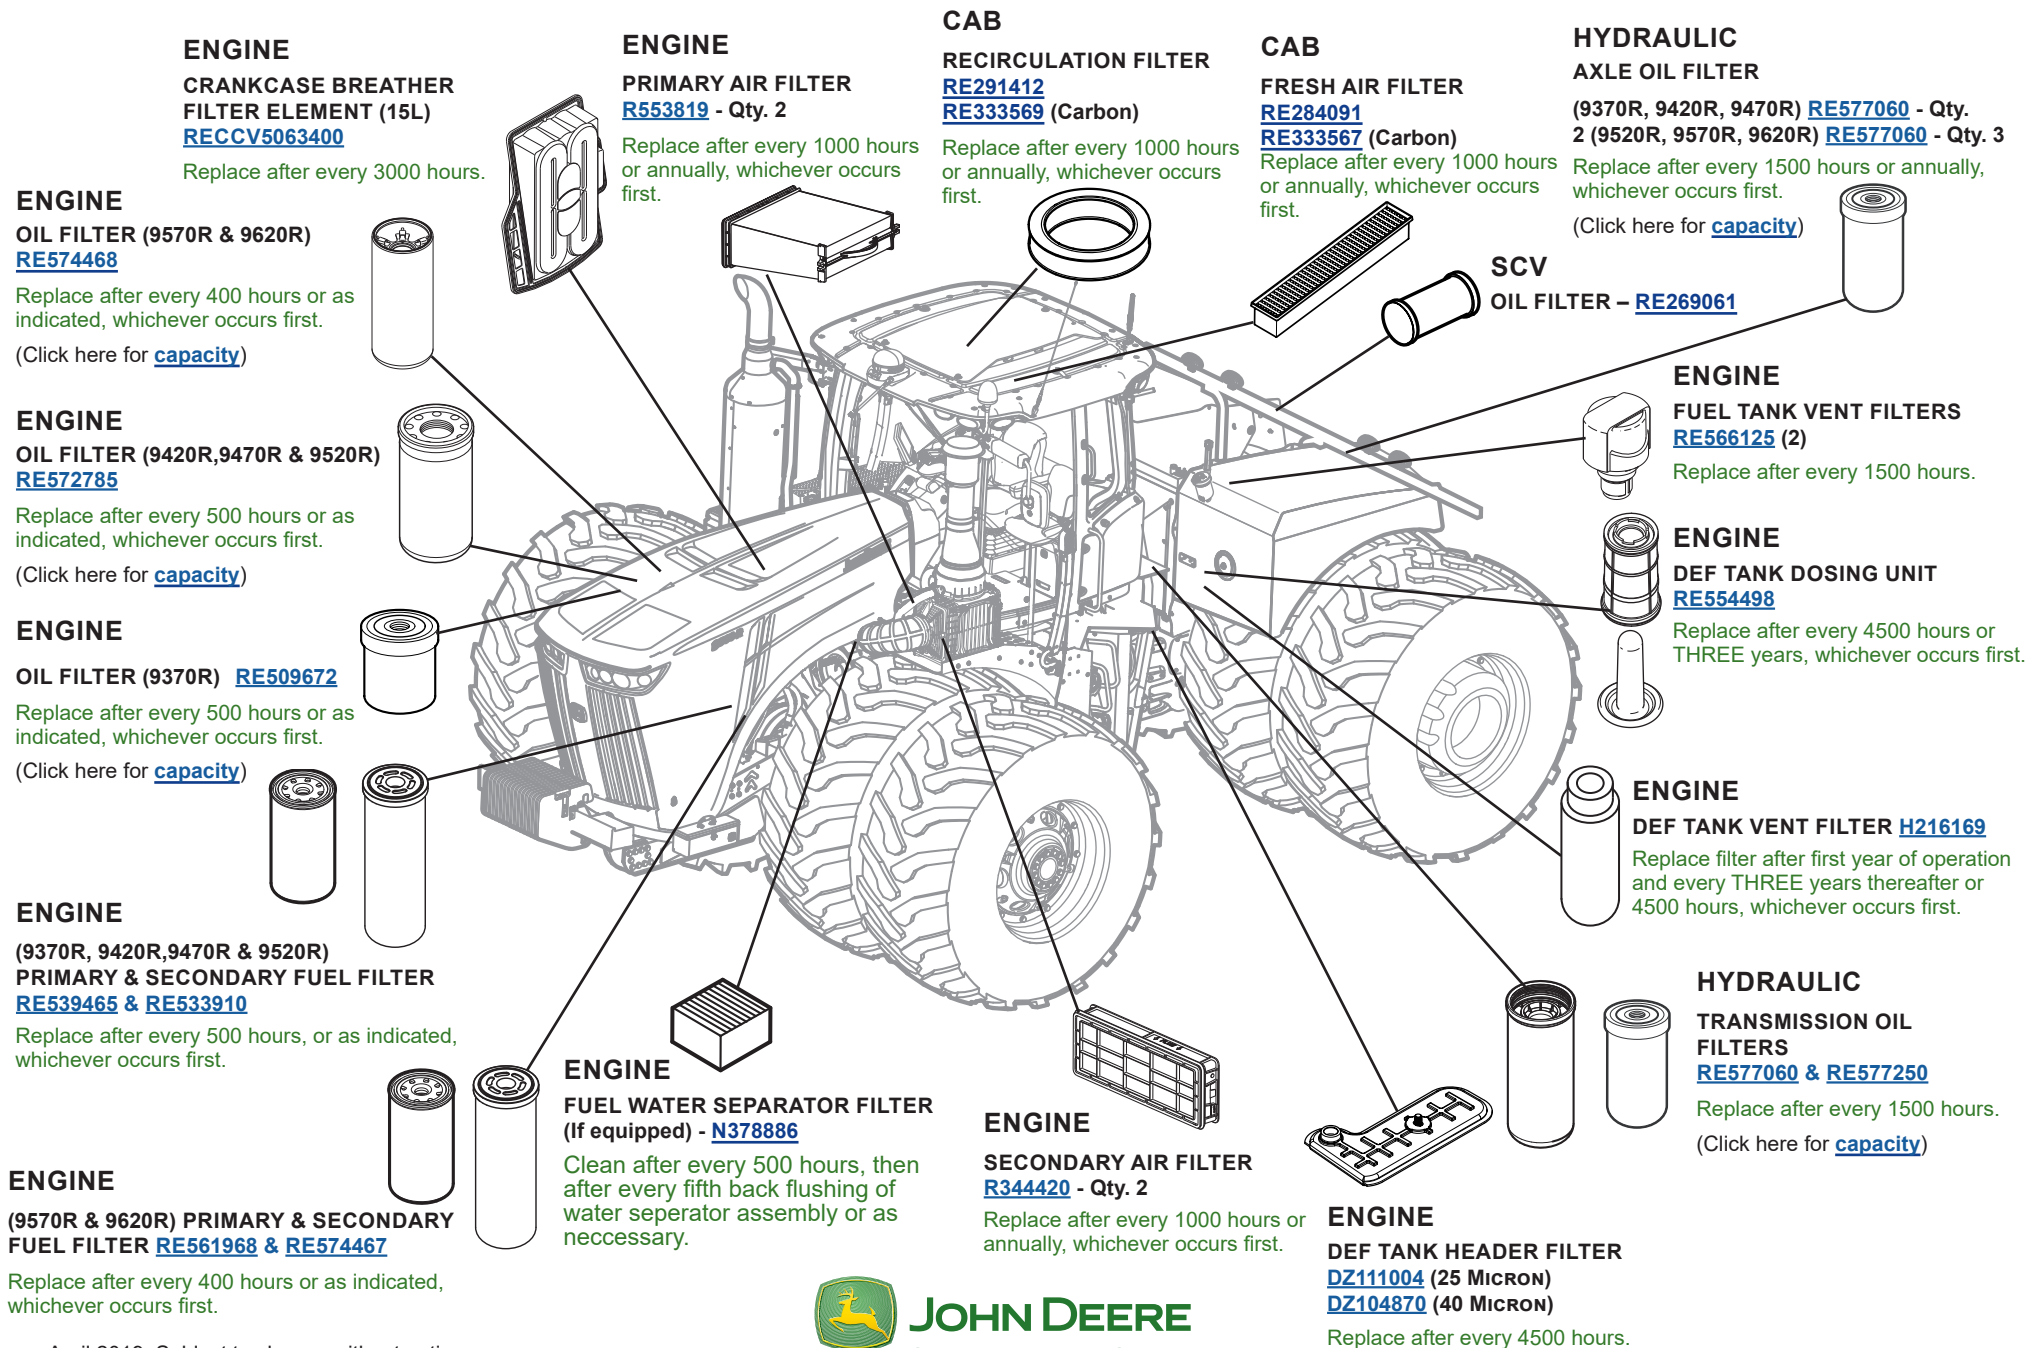

https://www.deere.com/en_US/parts/parts_by_industry/ag/fmi/filter_maintenance_information.page

CAPACITIES

9R Four Wheel Drive Final Tier 4 (FT4) Series Tractors - 9370R, 9420R, 9470R, 9520R, 9570R & 9620R

CAPACITIES (Approximate):

Fuel Tank:

9370R, 9420R & 9470R - SR Axles.....	1173 L (310 gal)
9520R, 9570R & 9620R - DR Axles	1514 L (400 gal)

Cooling System Including Overflow Tank:

Cool-Gard™ II

9370R.....	50 L (13.2 gal)
9420R, 9470R & 9520R	56.5 L (14.9 gal)
9570R & 9620R.....	62 L (16.3 gal)

Crankcase including Filter:

Plus-50™ II

9370R.....	34 L (9.0 gal)
9420R, 9470R & 9520R	48 L (12.7 gal)
9570R & 9620R.....	43.5 L (11.5 gal)

Diesel Exhaust Fluid John Deere Diesel Exhaust Fluid™

.....	83 L (22.0 gal)
-------	-----------------

Hydraulic Reservoir:

Hy-Gard™

Full - Cold	93 L (24.5 gal)
Min - Cold	81 L (21.5 gal)

Transmission/Hydraulic Reservoir:

Hy-Gard™

9370R, 9420R & 9470R - SR Axles Stand. Flow.....	265 L (70 gal)
9370R, 9420R & 9470R - SR Axles High Flow.....	268.5 L (71 gal)
9520R, 9570R & 9620R - DR Axles Stand. Flow	208 L (55 gal)
9520R, 9570R & 9620R - DR Axles High Flow	212 L (56 gal)

Hydraulic/Transmission/Axle without 3-point rear hitch and PTO

Hy-Gard™

9370R, 9420R & 9470R	276 L (73 gal)
9520R, 9570R & 9620R	220 L (58 gal)

Hydraulic/Transmission/Axle with 3-point rear hitch and PTO

Hy-Gard™

9370R, 9420R & 9470R	284 L (75 gal)
9520R, 9570R & 9620R	227 L (60 gal)

[Return to Filter Overview](#)

