

FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

9030 Series Wheel Tractors 9230, 9330, 9430, 9530, 9630

CAB

RECIRCULATION AIR FILTER – [RE187966](#)

Clean after every 250 hours and replace annually.

CAB

CARBON RECIRCULATION

AIR FILTER – [RE199682](#)

Do NOT clean. Change annually, after 500 hours, or as required.

ENGINE

SECONDARY AIR FILTER – [RE230985](#)

Replace after every second primary filter change.

ENGINE

PRIMARY AIR FILTER – [RE261960](#)

Replace annually or as required.

ENGINE

OIL FILTER (9230) – [RE509672](#)

OIL FILTER (9330-9630) – [RE572785](#)

Replace after 100 hours and then after every 250 hours. Initial oil and filter change is 100 hours maximum of operation. Scheduled interval can be extended to 375 hours if PLUS-50™ oil and a John Deere™ filter are used.

(Click here for [capacity](#))

TRANSMISSION

AXLE OIL FILTER – [YZ502378](#)

Replace after 100 and 750 hours, and then every 750 hours.

(Click here for [capacity](#))

TRANSMISSION

OIL FILTER – [RE174130](#)

Replace after 100 and 750 hours, and then every 750 hours.

(Click here for [capacity](#))

HYDRAULICS

SCV OIL FILTER

Ag and Scraper Tractors – [T175002](#)

Replace after 100 and 750 hours, and then every 750 hours.

(Click here for [capacity](#))

ENGINE

FUEL TANK VENT FILTER [H216169](#)

Replace every after 1500 hours (Interval may vary according to operating conditions).

CAB

FRESH AIR FILTER, HEAVY-DUTY [RE24619](#)

Clean every 250 hours and replace annually.

CAB

CARBON FRESH AIR FILTER – [RE199681](#)

Do NOT clean. Change annually, after 500 hours, or as required.

ENGINE – 9230

PRIMARY FUEL FILTER SECONDARY FUEL FILTER

Available only as Kit – [RE525523](#)

Replace after 100 hours and then every 250 hours.

ENGINE

(9330, 9430, 9530, 9630)

PRIMARY FUEL FILTER – [RE532952](#) SECONDARY FUEL FILTER – [DZ112918](#)

Replace after 100 and 250 hours, and then every 250 hours.

HYDRAULICS

OIL FILTER – [RE174130](#)

Replace after 100 and 750 hours, and then every 750 hours.


(Click here for [capacity](#))

HYDRAULICS

RESERVOIR OIL FILTER – [AT101565](#)

Replace after every 750 hours.

(Click here for [capacity](#))

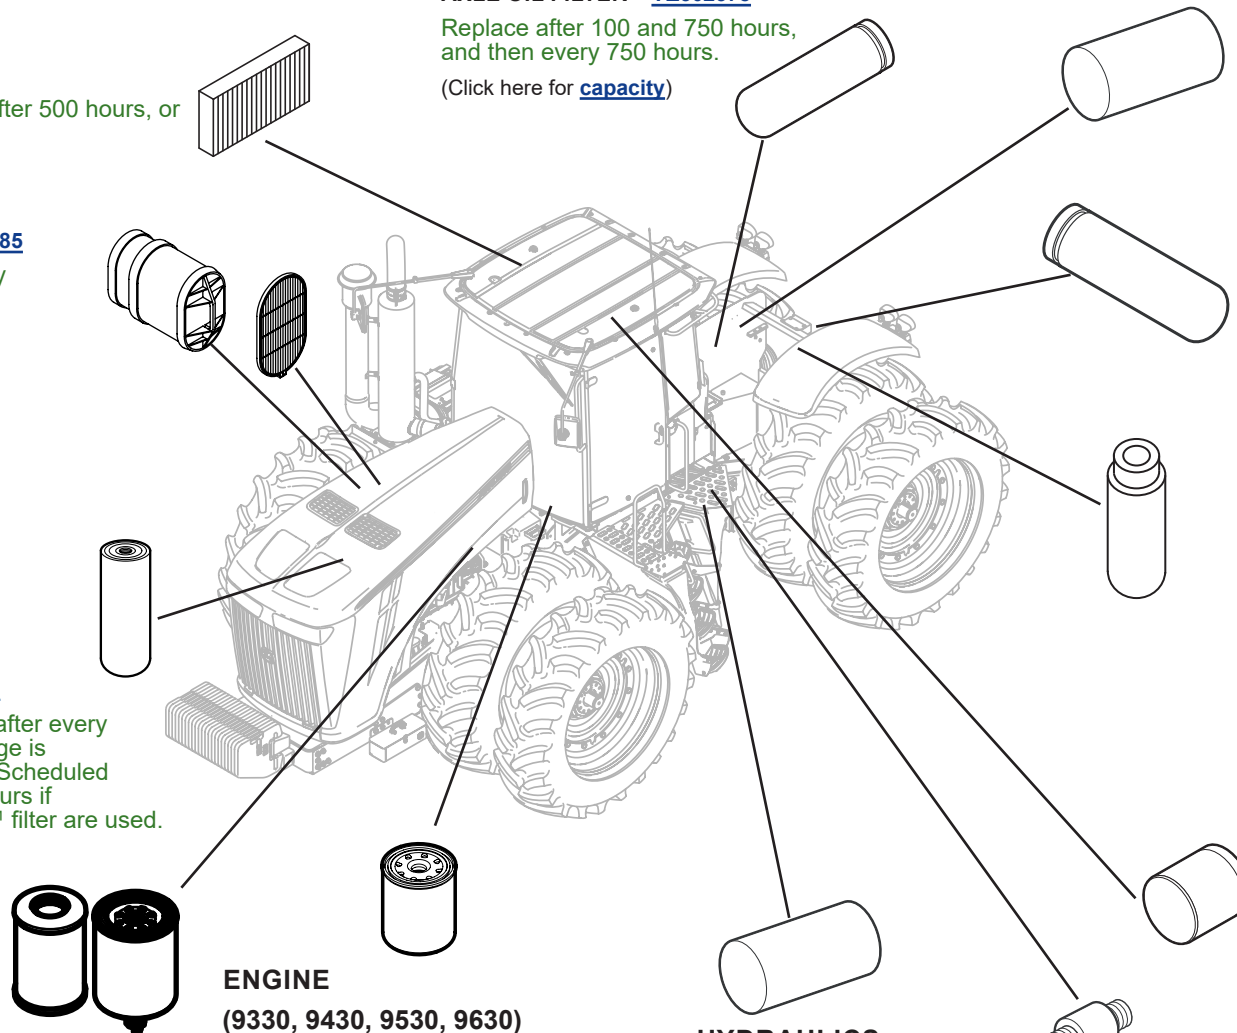

JOHN DEERE

Genuine Parts and Service

November 2020. Subject to change without notice.

https://www.deere.com/en_US/parts/parts_by_industry/ag/fmi/filter_maintenance_information.page

CAPACITIES

9030 Series Wheel Tractors 9230, 9330, 9430, 9530, 9630

CAPACITIES (Approximate):

Fuel Tank.....1325 L (350 gal)

Cooling System including Overflow Tank:

Cool-Gard™ II

9230.....47.5 L (12.5 gal)

9330-9430-9530-9630.....53 L (14 gal)

Crankcase including Filter:

Plus-50™ II

9230.....28 L (7.4 gal)

9330-9430 (SN 022000 -).....40 L (10.5 gal)

9330-9430 (SN - 021999).....42 L (11 gal)

9530-9630 (SN 022000 -).....56 L (14.8 gal)

9530-9630 (SN - 021999).....60 L (15.8 gal)

Transmission/Axle:

Hy-Gard™

24-Speed:

9230 & 9330.....100 mm Axles Without PTO.....140 L (37 gal)

9230 & 9330.....100 mm Axles With PTO.....144 L (38 gal)

9230, 9330 & 9430.....110 mm Axles Without PTO.....144 L (38 gal)

9230, 9330 & 9430.....110 mm Axles With PTO.....148 L (39 gal)

18-Speed Powershift:

9230.....100 mm Axles Without PTO.....166.6 L (44 gal)

9230.....100 mm Axles With PTO.....170.8 L (45 gal)

9230, 9330 & 9430.....110 mm Axles Without PTO.....170.8 L (45 gal)

9230, 9330 & 9430.....110 mm Axles With PTO.....174.5 L (46 gal)

9530 & 9630.....120 mm Heavy-Duty Axles.....87 L (23 gal)

Hydraulic System:

Hy-Gard™

Without Hitch - Standard.....103 L (27 gal)

With Hitch - Standard.....106 L (28 gal)

Without Hitch - High-Flow.....113.5 L (30 gal)

With Hitch - High-Flow.....117 L (31 gal)

[Return to Filter Overview](#)

