


# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 9560, 9660 Walker and Sidehill Series Combines

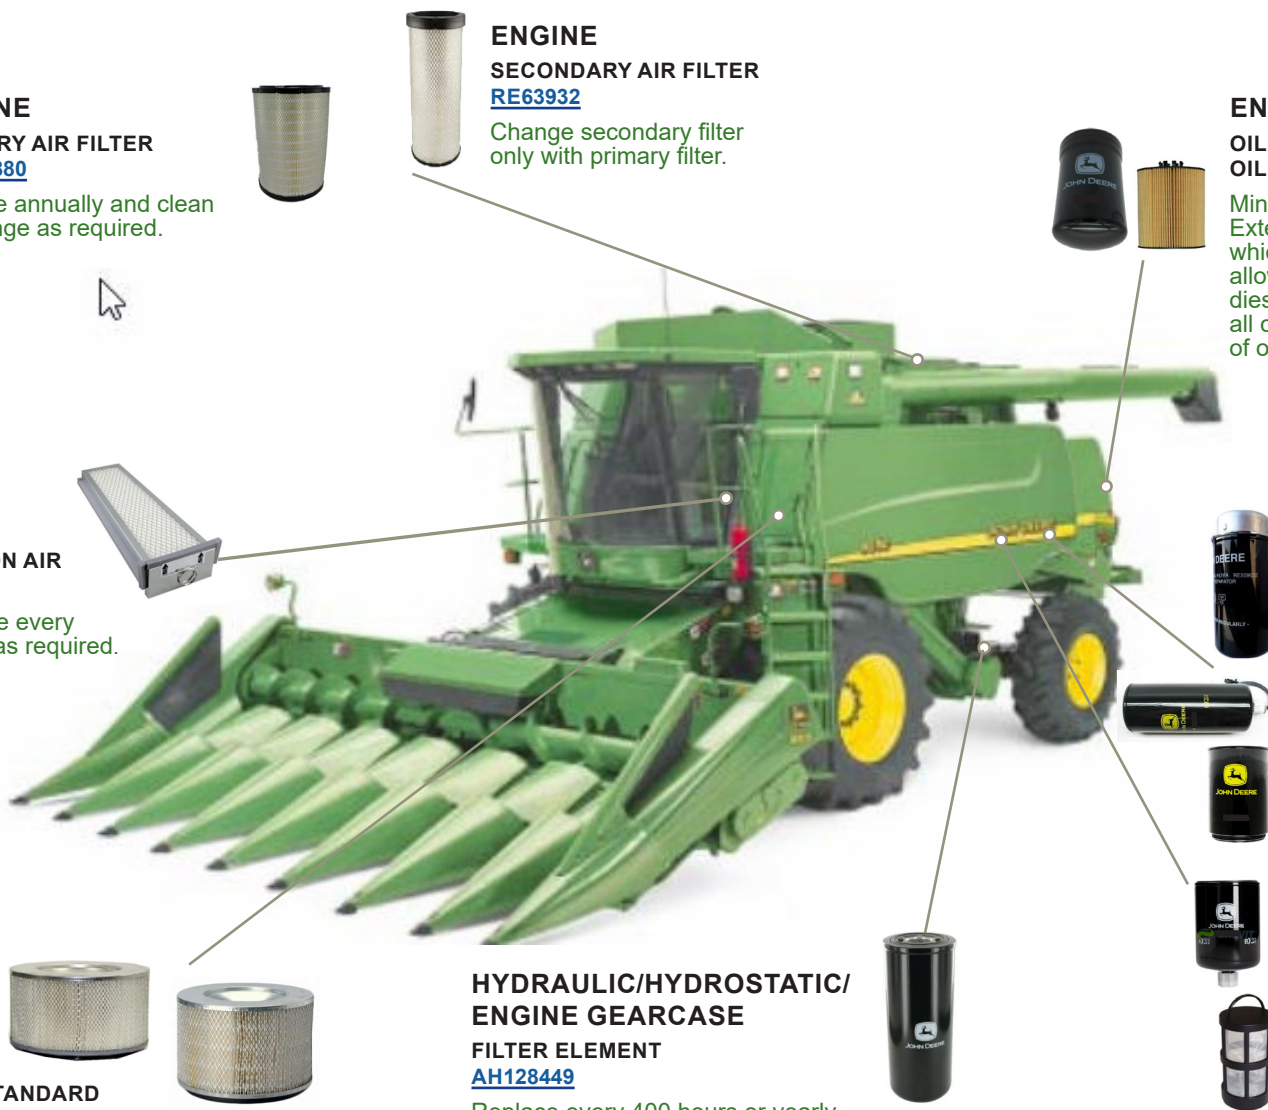

**ENGINE**  
**PRIMARY AIR FILTER**  
**[AH148880](#)**

Change annually and clean or change as required.



**ENGINE**  
**SECONDARY AIR FILTER**  
**[RE63932](#)**

Change secondary filter only with primary filter.



**ENGINE**  
**OIL FILTER (9560) – [RE504836](#)**  
**OIL FILTER (9560, 9660) – [RE509672](#)**

Minimum hours before first engine oil change is 100 Hours. Extended engine oil change every 500 hours or annually, whichever come first. The extended 500 hour interval is only allowed if using Plus-50™ II oil with a John Deere filter and diesel fuel with sulfur content less than 15mg/kg (15ppm). If all conditions are not met, change oil and filter at 250 hours of operation.



**CAB**  
**RECIRCULATION AIR**  
**[AH115836](#)**

Clean or replace every 200 hours and as required.



**CAB**  
**AIR FILTER, STANDARD**  
**[AH115833](#)**

**AIR FILTER, HEAVY DUTY**  
**[AH168783](#)**

Clean or replace after 50 hours and as required.



**HYDRAULIC/HYDROSTATIC/  
 ENGINE GEARCASE  
 FILTER ELEMENT**  
**[AH128449](#)**

Replace every 400 hours or yearly.  
 Note: Replace all three filters at a time.



**ENGINE**  
**PRIMARY FUEL FILTER (9560) – [RE509036](#)**  
**SECONDARY FUEL FILTER (9560) – [RE509032](#)**

**FUEL FILTER – [RE517331](#)**  
 Not For 9560SH, Upto Engine Serial Number (-710523).

**FUEL FILTER – [RE517331](#)**  
 For 9560SH, Upto Engine Serial Number (-710110).

**FUEL FILTER – [RE527957](#)**  
 Not For 9560SH, From Engine Serial Number (710524-).

**FUEL FILTER – [RE527957](#)**  
 For 9560SH, From Engine Serial Number (710111-).

**FUEL FILTER (9660) – [RE522372](#)**  
 Upto Engine Serial Number (-232462), Single Filter System.

**PRIMARY FUEL FILTER (9660) – [RE531703](#)**  
 From Engine Serial Number (232463-), Dual Filter System.

**SECONDARY FUEL FILTER (9660) – [RE522688](#)**  
 From Engine Serial Number (232463-), Dual Filter System.

**FUEL PRESCREEN (9560, 9660) – [R502778](#)**

**FUEL WATER SEPARATOR FILTER**  
**[RE500186](#)**

Replace every 500 hours and as required.



# CAPACITIES

## 9560, 9660 Walker and Sidehill Series Combines

### CAPACITIES (Approximate):

#### **Fuel Tank:**

9560, 9560SH, 9660..... 565 L (149.2 gal)

#### **Cooling System with Heater:**

##### **Cool-Gard™**

9560, 9560SH, 9660..... 40 L (10.5 gal)

#### **Engine Crankcase with Filter:**

##### **Torq-Gard Supreme™ or Plus-50™ II**

9560, 9560SH..... 32 L (8.4 gal)

9660..... 29.5 L (7.7 gal)

#### **Transmission:**

##### **GL-5**

9560, 9560SH, 9660..... 9.6 L (2.5 gal)

#### **Final Drives (Each):**

##### **GL-5**

9560, 9560SH..... 8.0 L (2.1 gal)

9660..... 8.0 L (2.1 gal)

#### **Feeder House Reverser Gearcase without Cooler:**

##### **GL-5**

9560, 9660..... 2.3 L (0.6 gal)

9560SH..... 0.9 L (0.2 gal)

#### **Feeder House Reverser High-Capacity with Cooler:**

##### **GL-5**

9560, 9560SH, 9660..... 3.5 L (0.9 gal)

#### **Primary Countershaft Drive Gearcase:**

##### **GL-5**

9560, 9560SH, 9660..... 1.2 L (0.3 gal)

#### **Beater / Straw Walker Drive Gearcase:**

##### **John Deere Corn Head Grease**

9560, 9560SH, 9660..... 0.4 L (0.1 gal)

#### **Dual-Range Cylinder Drive Gearcase:**

##### **GL-5**

9560, 9560SH, 9660..... 1.9 L (0.5 gal)

#### **Engine Gearcase:**

##### **Low Viscosity Hy-Gard™**

9560, 9560SH, 9660..... 16 L (4.2 gal)

#### **Loading Auger Gearcase:**

##### **GL-5**

9560, 9560SH, 9660..... 3.8 L (1 gal)

#### **Hydraulic / Hydrostatic Reservoir:**

##### **Low Viscosity Hy-Gard™**

9560, 9560SH, 9660..... 34 L (8.9 gal)

[Return to Filter Overview](#)

