


# FILTER OVERVIEW WITH SERVICE INTERVALS AND CAPACITIES

## 5010 Series - 5210, 5310, 5410 and 5510 Tractors

### CAB

AIR FILTER  
[RE64913](#) (ALL)

Service after every 250 hours.  
Replace annually once Service  
as required.



### CAB

FRESH AIR FILTER  
[R129370](#) (ALL)

Service after every 250 hours. Replace  
annually once. Service as required.




### ENGINE

PRIMARY AIR FILTER  
[RE68048](#) (-121087) (5210)  
[AT171853](#) (121088-) (5210)  
[AT171853](#) (5310, 5410, 5510)

SECONDARY AIR FILTER  
[RE68049](#) (-121087) (5210)  
[AT171854](#) (121088-) (5210)  
[AT171854](#) (5310, 5410, 5510)

Service after every 250 hours. Replace an-  
nually once Service as required.

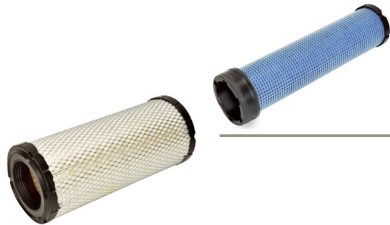

HYDRAULIC  
OIL FILTER  
[RE45864](#) (ALL)

Replace after first 100 hours, then after  
250 hours.

(Click here for [capacity](#))



### ENGINE

FUEL FILTER  
[RE60021](#) (ALL)

Replace after every 500 hours. Replace as  
required.



### ENGINE

OIL FILTER  
[T19044](#) (5210, 5310)  
[RE59754](#) (5410, 5510)

Replace after first 100 hours, then after 250  
hours or annually whichever comes first.

(Click here for [capacity](#))



**JOHN DEERE**  
Genuine Parts and Service

# CAPACITIES

## 5010 Series - 5210, 5310, 5410 and 5510 Tractors

### CAPACITIES (Approximate):

#### Fuel Tank:

Open Station	
5210, 5310, 5410.....	68 L (18 gal)
5510.....	87 L (23 gal)
Cab	
.....	87 L (23 gal)

#### Cooling System:

##### Cool-Gard™ II

5210, 5310.....	9.5 L (2.08 gal)
5410, 5510.....	10.8 L (2.37 gal)

#### Crankcase w/ Filter:

##### Plus-50 II™

.....	8.5 L (1.86 gal)
-------	------------------

#### Transmission and Hydraulic System:

##### Hy-Gard™

Dry Clutch.....	38 L (10 gal)
Wet Clutch.....	42.5 L (11 gal)

#### Mechanical Front Wheel Drive (MFWD) Axle:

##### Hy-Gard™

Axle Housing.....	5 L (1.09 gal)
Wheels Hub.....	0.6 L (0.13 gal)

[Return to Filter Overview](#)