

REPLACEMENT PARTS GUIDE

652R EFI Quik-Trak™ Mower with 52 inch Side Discharge Deck

ENGINE



OIL FILTER

[AM125424](#)

Change every 100 hours or Annually.



ENGINE OIL

[TY26669](#) (John Deere Plus-50™ 10W-30)
(2.1 L (2.2 qt.))

Change every 100 hours or Annually.



AIR FILTER

[M131802](#) (PRIMARY AIR CLEANER)

Change every 300 hours.



[M131803](#) (SECONDARY AIR CLEANER)

Change every 500 hours.



JOHN DEERE MULTI-PURPOSE HD LITHIUM COMPLEX GREASE

[TY24416](#)

GREASE GUN

[TY26183](#)

Change As Required.



IN LINE FUEL FILTER

[MIU13224](#) (USE WITH [MIA12253](#))

[UC16183](#) (USE WITH [MIA12650](#) OR
[MIA13021](#) OR [AUC14248](#))

Change every 300 hours.



SPARK PLUG

[MIU11020](#)

Change every 1000 hours.



FUEL & AIR



FILLER CAP

[TCU34085](#) (S/N: - 075001)

[AUC14828](#) (S/N: 075001-)



MUFFLER

[TCA23468](#) (S/N: - 060000)

[AUC14364](#) (S/N: 060001-)

ELECTRICAL



ROTARY SWITCH

[TCA22740](#) (S/N: - 045000)

[AUC18708](#) (S/N: 045001-)



CONTROL LEVER THROTTLE CABLE

[TCA23210](#) (S/N: - 070000)

[AUC18416](#) (S/N: 070001-)



REVERSE IMPLEMENT PUSH SWITCH

[TCA21027](#) (S/N: -045000)

[AUC11785](#) (S/N: 045001-)



IGNITION KEY

[AUC12681](#)



BATTERY

[TY25221B](#) (12 V)

TRANSMISSION/ HYDRAULIC



HYDRAULIC OIL FILTER

[TCA23150](#)

Change every 100 hours or Annually.



TRACTION DRIVE BELT

[UC28182](#) (LGTH = 1627 mm, WIDTH = 14 mm,
TK = 15 mm)

REPLACEMENT PARTS GUIDE

652R EFI Quik-Trak™ Mower with 52 inch Side Discharge Deck



MOWER BLADE

[TCU34280](#) (CUT LENGTH = 165.1 mm)




MULCH BLADE

[UC10725](#) (CUT LENGTH = 177.8 mm)



MOWER DECK LEVELLING

[AM130907](#)

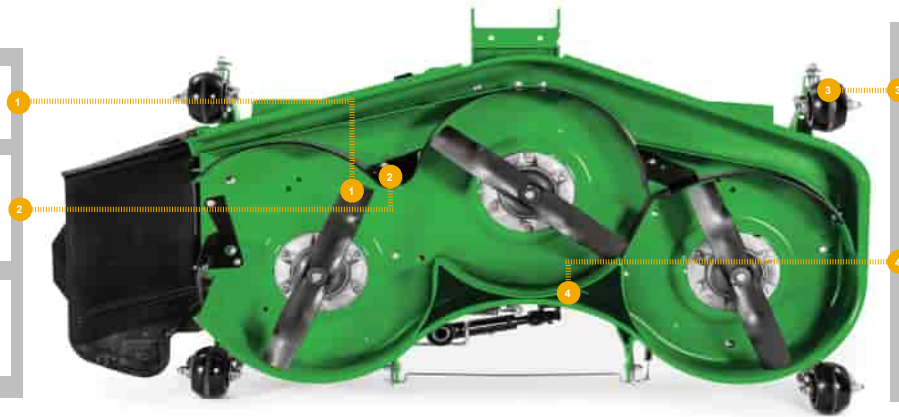

GAGE WHEELS

[UC28193](#)



FLAT MOWER BELT

[TCU34219](#) (PRIMARY) (S/N: - 045000)
(LGTH = 2134.61 mm,
WIDTH = 16.66 mm, TK = 10.31 mm)

[UC11266](#) (PRIMARY) (S/N: 045001-)
(LGTH = 2125 mm, WIDTH = 16 mm)

[TCU34215](#) (Secondary) (LGTH = 1169.41 mm,
WIDTH = 16.66 mm, TK = 10.31 mm)